


SINGLE-BAY SMART CHARGER

Including:

- 1 x 30601 AC/DC Power Supply
- 1 x Power-Cable-3pol

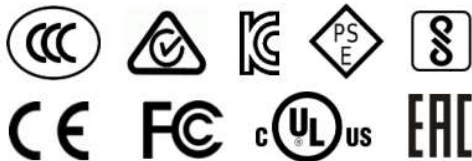

Features:

- 50W single bay smart charger
- For the smart battery REF 60402 Battery Pack HW
- Optimized charging process:
 - Longer cycle life
 - Faster charging
- Simple operation – Plug and Play
- External power supply for worldwide use
- Country specific AC input cable included

Intended Use:

This smart charger is a component of the ViVi® System, to be used by healthcare professionals outside the patient environment to charge and store the Battery Pack HW REF 60402.

Specification

Input		
Voltage range	19.00 – 26.00VDC	
Current	2.80A max.	
Power	50.00W	
Output		
Voltage range	0 - 17.40VDC	
Current range	0 - 4.80A	
Voltage tolerance	±1% max.	
Current tolerance	±10% max. @1.00A, ±3% max. @4.00A	
Charge power	50.00W max.	
Protection	Short circuit, over temperature shutdown, input-/output over current	
Environmental		
Cooling	convection cooled	
Temperature	Operating: 0°C to 40°C	Non-operating: -10°C to 70°C
Pressure & Altitude	Operating: 1060hPa to 795hPa -382m to 2000m	Non-operating: 1060hPa to 572hPa -382m to 4570m
Humidity	5% to 95% r.H., non-condensing	
General		
Efficiency	~95% at 100% load	
Indicator	Multi-color LED (green, red, orange)	
Battery types	REF 60402 Battery Pack HW	
Green procurement	RoHS 2011/65/EU WEEE 2012/19/EU Chinese RoHS	
LED Indications		
One time Red/Orange/Green	Self-test: Charger is ready for use.	
Red/Green blinking	Battery recognition and initialization.	
Orange light	The inserted battery is of the correct type and is currently being charged.	
Green light	The battery is charged and can be removed for use.	
Red blinking	The battery is too hot or too cold to be charged without damage. If the battery is too cold it will be charged as soon as it has warmed up sufficiently. If the battery is too hot it should be removed to cool down.	
Red light	The battery is damaged or it is a conventional battery which cannot be recharged.	
Charger Mechanical Details		
Housing dimensions (LxWxH)	120 x 64 x 43mm	
Weight	110g (excluding power supply)	
Safety & EMC		
Regulatory approvals	Europe	CE
	International	CB
Electromagnetic Emissions	Europe USA	EN55011, EN55022, level B FCC15 class B
Electromagnetic Immunity	ESD immunity	EN/IEC61000-4-2
	Electromagnetic field immunity	EN/IEC61000-4-3
	EFT / Burst	EN/IEC61000-4-4
	Surge	EN/IEC61000-4-5
	Conducted Immunity	EN/IEC61000-4-6
	Magnetic Fields	EN/IEC61000-4-8
	Voltage dips, short instrumentations & voltage variations	EN/IEC61000-4-11
Immunity characteristics	EN55024	

Specification external power supply AC/DC

Input		
Voltage range	100.00 – 240.00VAC	
Current	1.70A max.	
Stand by power	No load < 0.50W @ 230.00VAC	
Output		
Voltage range	19.00VDC	
Power	65.00W max.	
Current range	3.40A	
Protection	Over voltage, over current, short circuit	
Environmental		
Temperature	Operating: 0°C to 40°C	Non-operating -10°C to 70°C
General		
Efficiency	California's Energy Efficiency Level VI	
Ripple & Noise	300mV (p-p)	
Power Supply Mechanical Details		
Standard output connector	DC barrel jack, 5.5 x 2.5mm	
Housing dimensions (LxWxH)	95 x 50 x 25.4mm	
Weight	270g	
Regulatory Approvals		
Approvals	Europe International USA & Canada Australia & New Zealand Russia (Customs Union) Korea China Japan India	CE CB cULus RCM EAC KC CCC PSE BIS